


TEXAS KING BRICK

Data Sheet

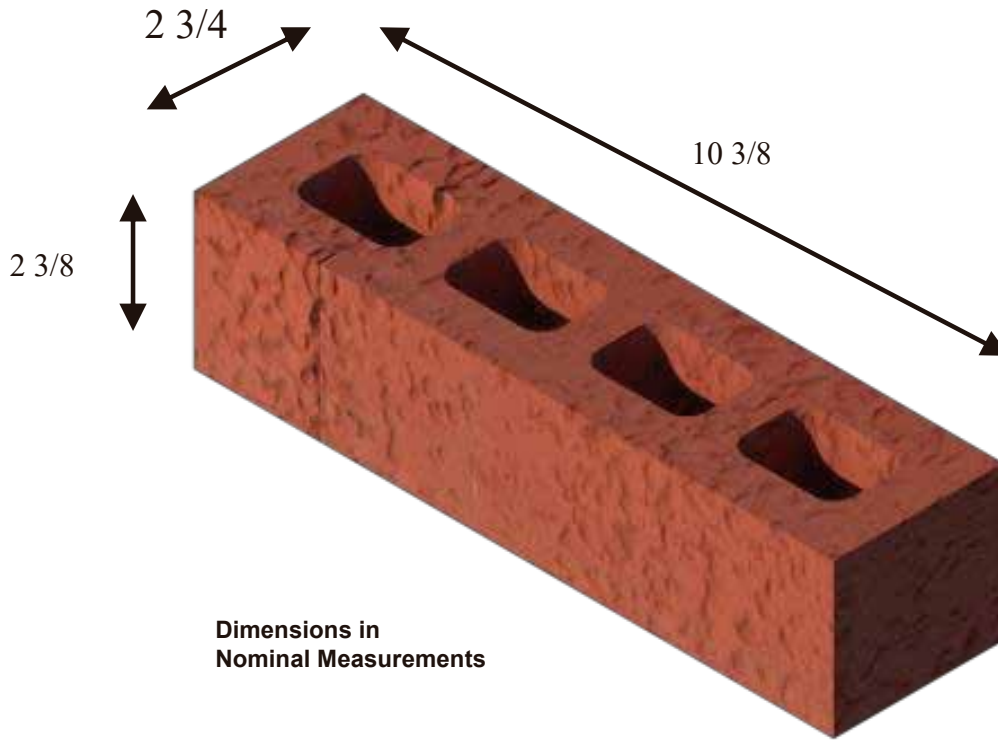


AVAILABLE IN RUSTIC, WIRE CUT AND SMOOTH FINISHES

NOMINAL DIMENSIONS			
	HEIGHT	WIDTH	LENGTH
in	2 3/8	2 3/4	10 3/8
mm	60	70	264
DIMENSIONAL TOLERANCE			
	HEIGHT	WIDTH	LENGTH
in	4/32	4/32	5/32
mm	3	3	4


WALL THICKNESS		
in	Exteriors: 23/32"	Interiors: 10/16"
mm	Exteriors: 19.05	Interiors: 15.88
Net area (%)		69.56
pcs / sq ft: 4.8	pcs / m ² : 52	3/8" joint (1cm)
Weight per piece (kg)		1.2 a 1.3
Weight per piece (lb)		2.65 a 2.86
Bricks per pallet		540
Weight per pallet (kg)		702
Weight per pallet (lb)		1,547

NATURAL ORANGE NAKED BRICK

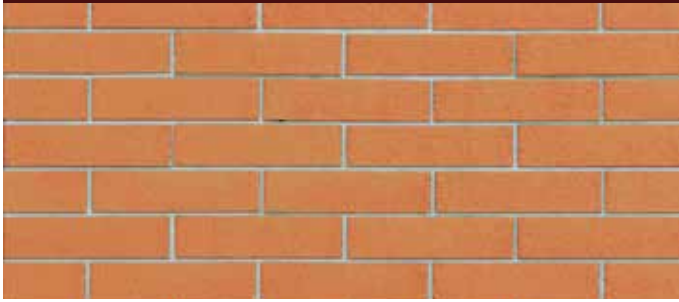

24 hour cold water absorption **16-18%**
Average compressive strength **2844.7 (psi)**

POMEGRANATE RED

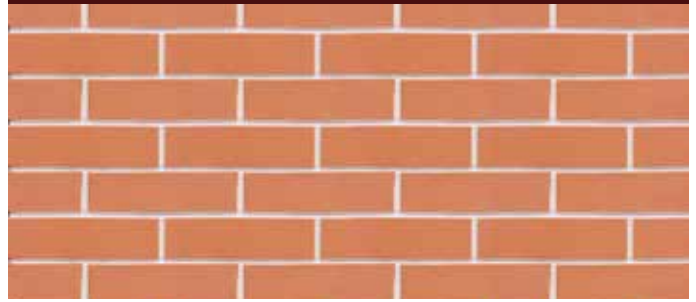


24 hour cold water absorption **12.6%**
Average compressive strength **4267.1 (psi)**

MONARCH



24 hour cold water absorption **16-18%**
Average compressive strength **2844.7 (psi)**

BORDEAUX

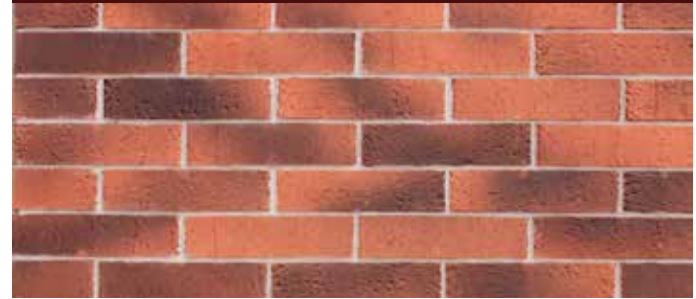

24 hour cold water absorption **12.6%**
Average compressive strength **4267.1 (psi)**

PEARL WHITE



Average compressive strength **4267.1 (psi)**
24 hour cold water absorption **12.6%**